

(Tc = 25°C unless otherwise specified)

$V_{DS,max}$	Drain source voltage	1200	V	V_{GS} = 0V, I_D = 100 μA	
$V_{GS,max}$	Gate source voltage	-8 /+22	V	Absolute maximum values	Note1
$V_{GSpulse}$	Gate-source voltage,max. transient voltage	-10 /+25	V	$t_p \leq 0.5\mu s$, D 0.01	
V_{GSop}	Gate source voltage	-4 /+18	V	Recommended operational values	
I_D	Continuous drain current	218	A	V_{GS} = 18V, T_C = 25˚C	
		154		V_{GS} = 18V, T_C = 100˚C	
$I_{D(pulse)}$	Pulsed drain current	744	A	Pulse width tp=100 μs limited by $T_{J,max}$	
T_J , T_{stg}	Operating Junction and storage temperature	-55 to +175	˚C		

Note 1 when using MOSFET Body Diode $V_{GS,max}$ = -4 / +22V

(Tc = 25°C unless otherwise specified)

$V_{(BR)DSS}$	Drain-source b[illegible]a	-				

[illegible] E



Figure 7. Transfer characteristic for various junction temperatures

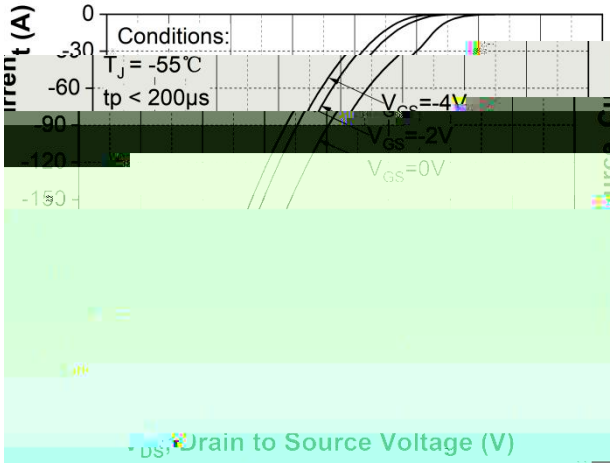


Figure 8. Body diode characteristic at T_J = -55 ºC

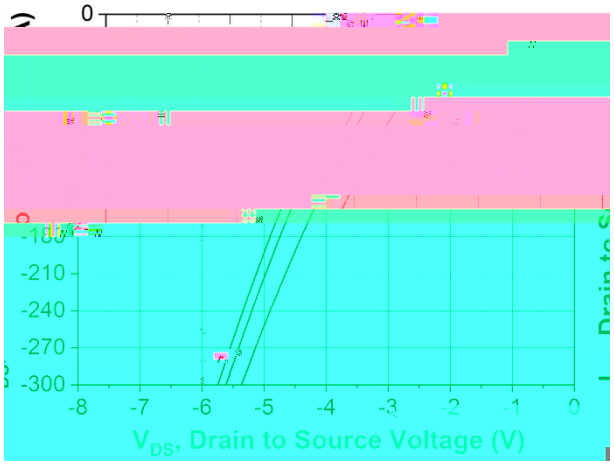


Figure 9. Body diode characteristic at T_J = 25 ºC

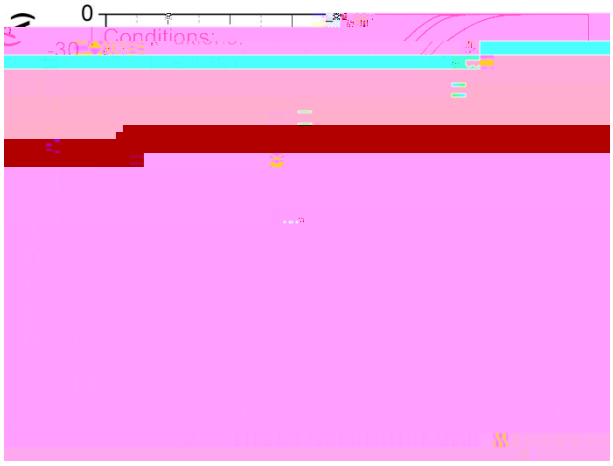


Figure 10. Body diode characteristic at T_J = 175ºC

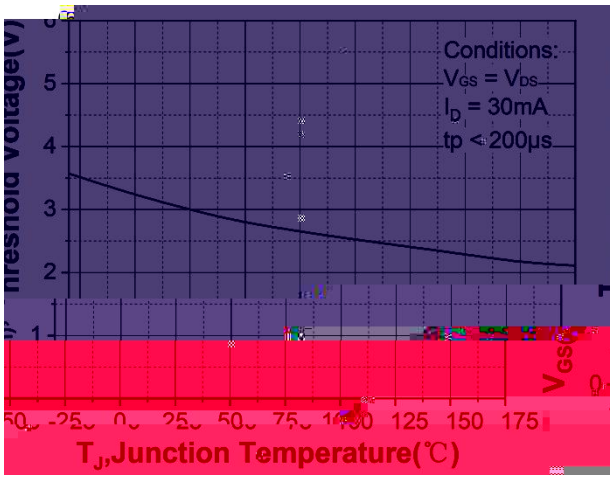


Figure 11. Threshold voltage vs. temperature

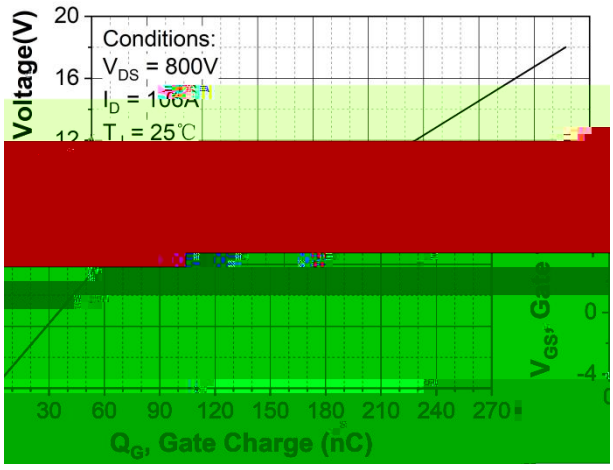


Figure 12. Gate charge characteristic

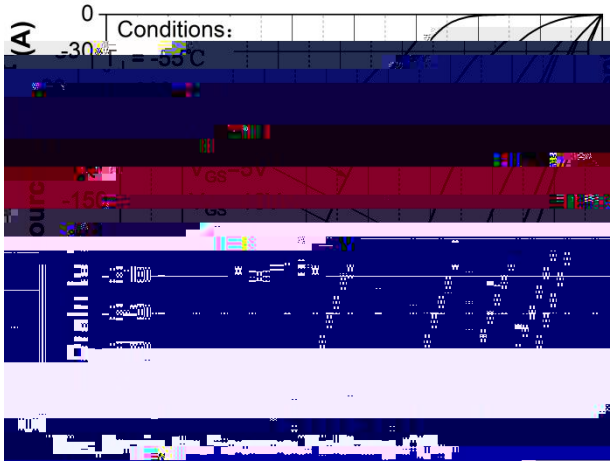


Figure 13. 3rd quadrant characteristic at T_J = -55 ºC

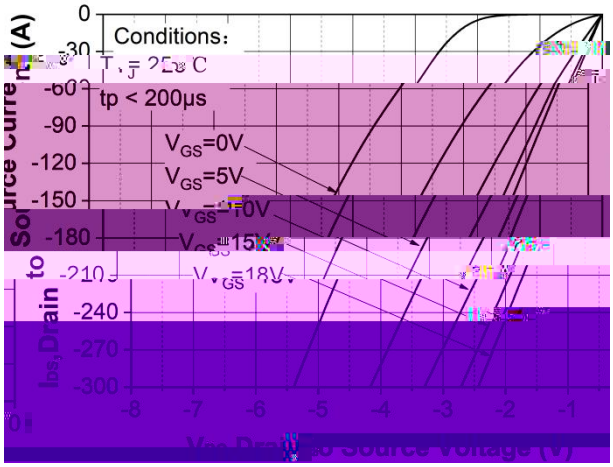


Figure 14. 3rd quadrant characteristic at T_J = 25 ºC

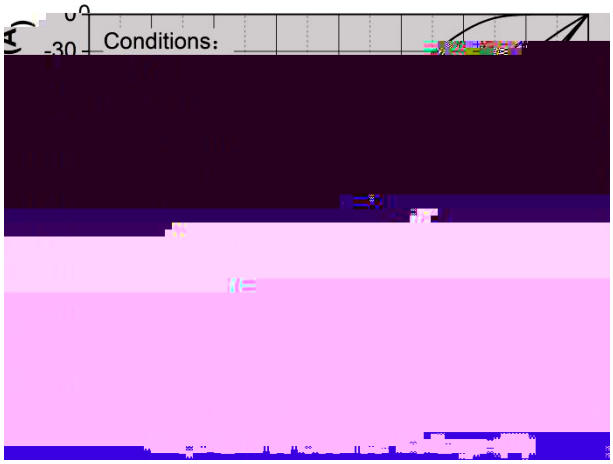


Figure 15. 3rd quadrant characteristic at T_J = 175 ºC

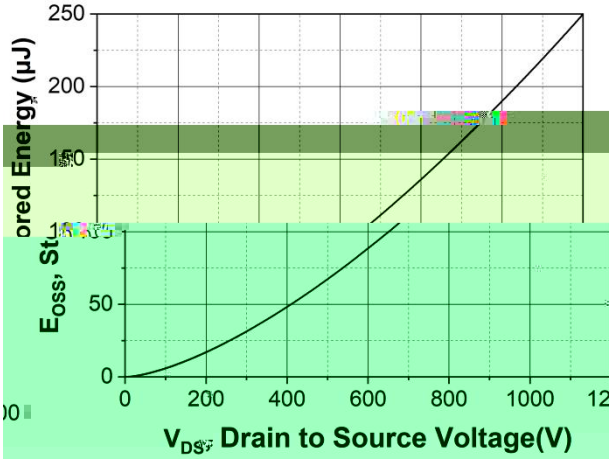


Figure 16. Output capacitor stored energy

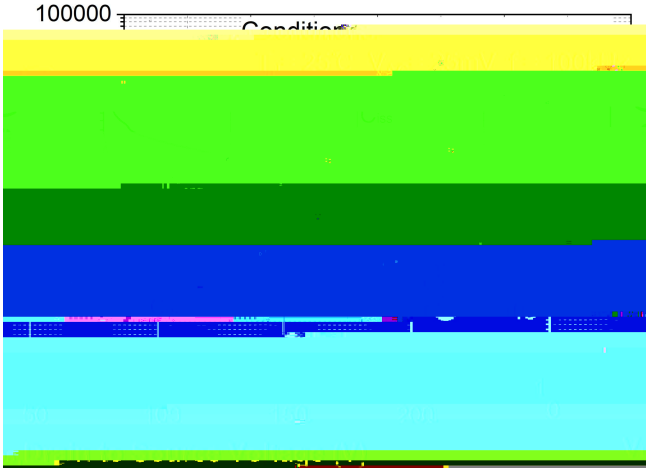


Figure 17. Capacitances vs. drain-source voltage (0 - 200V)

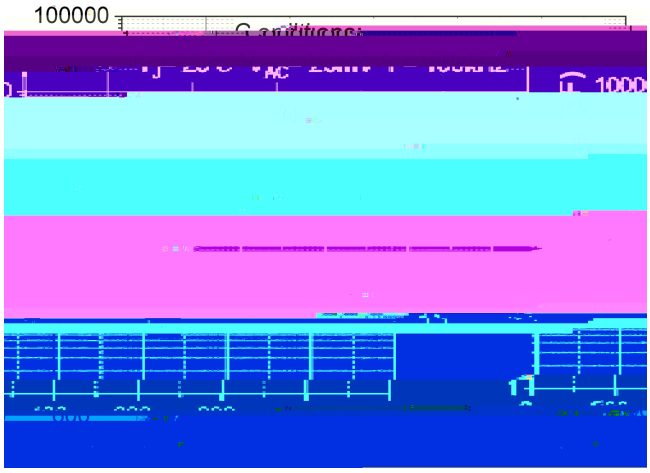


Figure 18. Capacitances vs. drain-source voltage (0 - 1200V)

Datasheet

Datasheet ≠ Æ æ

6. Due to technical requirements products may contain dangerous substances. For information on the types in question please contact Sichain office.

7. Except as otherwise explicitly approved by Sichain in a written document signed by authorized representatives of Sichain, Sichain' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

8. For use of our products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a Sichain representatives, for example but not limited to: transportation equipment,primary communication equipment,traffic lights,fire/crime prevention, safety equipment, medical systems, and power transmission systems.